


Quick-Start Guide

SmartLinc™ - INSTEON® Central Controller

Model: #2412N, rev 2.0 –

An Internet web server interface to your INSTEON products, optimized for mobile devices (especially iPhone / iPod touch). Also gives you the ability to create downloaded timers.

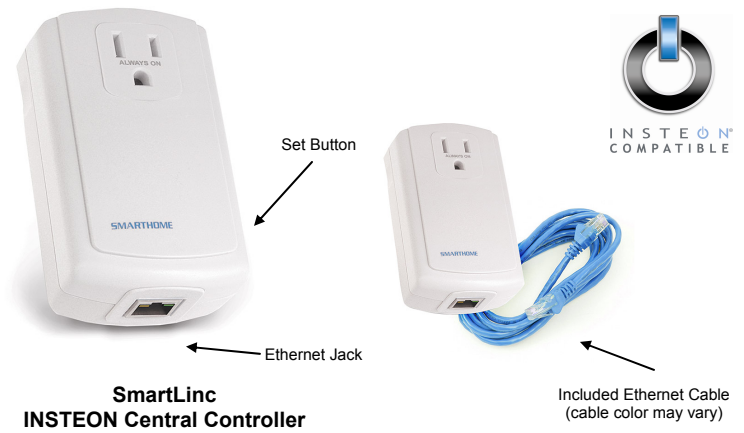

Installation

- 1 Plug included Ethernet cable into an open LAN port on your router (Cable color may vary. Shown yellow in steps 1-4 and blue in the image above, but could be any color.)
- 2 Plug the other end of Ethernet cable into SmartLinc's Ethernet jack
- 3 Plug SmartLinc into an AC outlet
SmartLinc's white LED should turn on dimly
- 4 Verify proper connection between SmartLinc and your router:
Router's LED for the port SmartLinc is plugged into should be on Green LED on SmartLinc's Ethernet jack should be on



Log into SmartLinc while at Home

- 5 Open a browser on your PC, PDA, or mobile phone, while connected to the Internet
NOTE: JavaScript support required for default web server application. HTML version is available for devices that do not support JavaScript. Both versions of SmartLinc can be accessed simultaneously. For access to the HTML version, see step 8.
- 6 Type <http://smartlinc.smarthome.com>
- 7 Click on "I'm at home"
- 8 Click on the link that begins with <http://>
 - To access HTML version, type "hindex.htm" to the end of your web address

*SmartLinc's Home Page will appear
"You should check the clock" text will disappear once you set the clock*

Note: If you experience any issues or would like more information, please visit http://wiki.smarthome.com/index.php?title=SmartLinc_Help.

Help me find my SmartLinc	
I'm at home	
I'm not at home	
New User Registration	
Your Internet IP Address: xxx.xxx.xxx.xxx	
SmartLinc Found	
In-home link to your SmartLinc: http://192.168.2.2:80	
MAC Address	00:0E:F3:XX:XX:XX
INSTEON ID	XX:XX:XX
MyHouse ?	
Choose A Room	
You should check the clock!	
<input type="text" value="room"/>	
	Time

SmartLinc Icons

Home Screen



Returns you to the SmartLinc Home Screen

Settings



Takes you to SmartLinc general settings

Help



Takes you to the SmartLinc Help page on the Smarthome Wiki

Room Settings



Takes you to the Room Settings screen where you can add, remove, and rename your rooms and add URL's (cameras)

Scene Settings



Takes you to the Scene Settings screen where you can add, remove, and rename your scenes

Setting the Time, Day, House Name and Location

- 9 Click on the Settings icon (Wrench, bottom center) (or get here the first time opening SmartLinc, by clicking on "You should check the clock")
- 10 Type in the correct time and click "Set Time"
- 11 Click on the correct day of week and click "Set Day"
- 12 If desired, type in a name for your house and click "Set House Name"
- 13 If you'll be using sunrise/sunset timers, click "Change Location"
- 14 Select your city (or nearby city) from the drop-down list, or if you prefer, enter your latitude / longitude
- 15 Select / confirm the appropriate daylight savings time settings
- 16 Confirm the correct date and click "Save and return"



Setup a Room, a Device (Scene) and a Timer

Let's say you'd like to create a room called "Front Yard", with the device/scene "Front Lights" that you'd like to come on weekdays at 7pm and go off at 11pm

- 17 Click the Room Settings icon (lower left corner of homepage)
 - 18 Type "Front Yard" over the first room label (room indicates that no name had been assigned yet)
 - 19 Ensure the Show Room checkbox to the right of the room name is checked
 - 20 Click "Save and Return"
- Click on "Front Yard"



Setup a Room, a Device (Scene) and a Timer (cont'd)

- 21** Click the Scene Settings icon (lower left)



- 22** Type "Front Lights" over the first scene label

- 23** Click the Show checkbox to the right of the scene name

- 24** Click "Save and Return"

- 25** Click on "Front Lights"

- 26** Click on "Add"

The Add/Remove Status will change to "waiting".....

- 27** Press & Hold the Set button on the Front Lights SwitchLinc (or other INSTEON device such as KeypadLinc, LampLinc, etc.) for 5 seconds (or per that device's Quick-Start Guide Linking instructions)

The Add/Remove Status will change to "Done" – and display the INSTEON ID of the device you added (e.g. 0D425B).

- 28** Click the On and Off icons

Your lights will turn on and off

- 29** **Note:** Your SmartLinc will now monitor and display the status of your Front Lights SwitchLinc (or whichever device was Linked first) for your Front Lights scene. If you wish to change this, scroll down to the bottom of the page and either enter a new INSTEON ID in the Status Device ID field or uncheck "Report Status" to disable status reporting for this scene.

- 30** Type 07:00 into the On Time box and click "PM". **Hint:** You may also select "Sunset" for your timer to turn on at sunset.

- 31** Type 11:00 into the Off Time box and click "PM". **Hint:** You may also select "Sunrise" for your timer to turn off at sunrise.

- 32** Click on "Sat and Sun" (to uncheck these days)

- 33** Click on "Save and Return"

Complete Instructions, Troubleshooting, and Tech Support

Owner's Manual: http://wiki.smarthome.com/index.php?title=2412N_Manual_rev_2.0

Call: Tech. Support @ 1-800-SMARTHOME (800-762-7846)

Contact Us Online: <http://www.smarthome.com/contactus.html>